

D

C

B




A

D

C

B

A

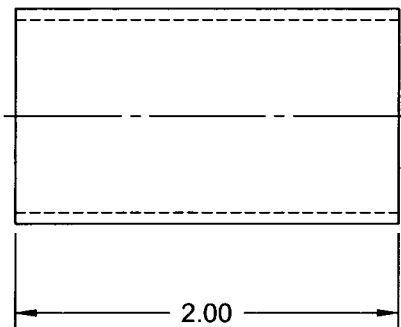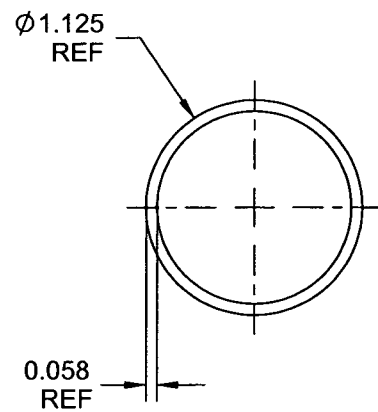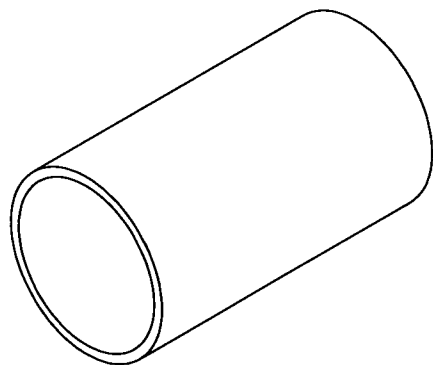

B67-43001-287 INNER TUBE GUIDE, BLADE POSITIONER

RELEASED
2009-09-24
mf

- NOTES:**
- 1) MATERIAL: 6061-T6 OR 6061-T62 ALUMINUM TUBING
PER WW-T-700/6 OR AMS4080 OR AMS 4082 OR
AMS-QQ-A-200/8 OR AMS-QQ-A-225/8
REF. DART SPEC. M6061T6T1.125W.058
 - 2) FINISH: N/A
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: N/A
 - 7) WEIGHT: 0.04 lbs

C	REDRAWN PREMIER AVIATION DRAWING IAW DART QSI 018 AND QSI 043. FOR PREVIOUS REVISIONS, REFER TO SHEET 36 OF PREMIER AVIATION DRAWING No. B67-43001. REASON: SEE PAR#09-011.		MB	09.02.27
REV.	DESCRIPTION		BY	DATE
DESIGN	RW	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA		
DRAWN				
CHECKED	<i>HS</i>	DRAWING NO. B67-43001-287		REV. C
MFG. APPR.	<i>MB</i>			SHEET 1 OF 1
APPROVED		TITLE		SCALE
DE APPR.	N/A	INNER TUBE GUIDE, BLADE POSITIONER		NTS
DATE	09.02.27	COPYRIGHT © 1995 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.		